

TOYO TIRES®

PROXES[®]4™

ALL-SEASON ULTRA-HIGH PERFORMANCE RADIAL

The Proxes 4 is Toyo's latest all-season ultra-high performance tire. It is designed primarily for plus-fitment applications on sport compact cars, sports sedans, and coupes. A wide range of tire sizes are available in V and W speed ratings.

Typical Vehicle Matches

Acura Integra, RSX, TL; Audi A4, TT; BMW 3-Series, Z4; Chevrolet Cobalt; Dodge Caliber, SRT-4; Ford Focus, Mustang; Honda Accord, Civic; Hyundai Tiburon; Lexus IS250; Mazda 3, 6, Miata, RX-8; Mini Cooper; Mitsubishi Eclipse; Nissan Sentra, Altima, Maxima; Subaru Impreza; Scion xA, tC, xD; Toyota Corolla; Volkswagen GTi, Jetta, New Beetle, Passat, Rabbit.

500 MILE
or 45 DAY
TRIAL OFFER
AVAILABLE
LIMITED WARRANTY. ASK FOR DETAILS.




UTQG
300 AA A



Customer Benefit	Product Features
Wet Traction and Dry Performance	<ul style="list-style-type: none"> • “Generation S” silica-reinforced, high-grip tread compound • Unidirectional tread design to reduce aquaplaning • High-angle tread grooves to evacuate water • Paired shoulder blocks to increase cornering grip • Curving center rib to enhance directional stability
Steering Response	<ul style="list-style-type: none"> • T-Mode Design Technology • Hard bead filler compound • Two full-width steel belts • High grip tread compound
All-Season Traction	<ul style="list-style-type: none"> • Unidirectional all-season tread design • “Multi-Wave” Sipes in shoulder blocks • M&S rated
Smooth, Quiet Ride	<ul style="list-style-type: none"> • T-Mode Design Technology • “Multi-Wave” Sipe for minimized heel and toe wear • Variable-pitch block tread pattern • Jointless edge and cap ply construction • Jointless bead wire
Durability and Tread Life	<ul style="list-style-type: none"> • T-Mode Design Technology • “Generation S” silica-reinforced, high-grip tread compound • Two full-width steel belts • 300 UTQG treadwear rating
Appearance	<ul style="list-style-type: none"> • Aggressive unidirectional tread design • Unique “W-Shape” tread pattern • Modern high-image sidewall design • Unique “4” logo on tread elements

PROXES⁴

ALL-SEASON ULTRA-HIGH PERFORMANCE RADIAL

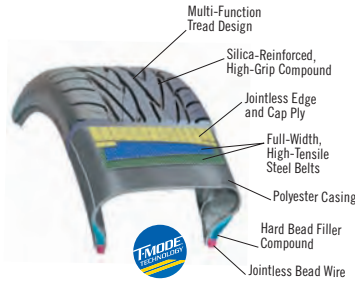

Construction may vary by size



PERFORMANCE

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (32")	Inflated Dimension		Static Loaded Radius (inch)	Max. Load (lbs.)	Max. Pressure (PSI)	Revs Per Mile	Price
					Overall Diameter (inch)	Overall Width (inch)					
205/55R15 92V RD	197320	5.5-6.5-7.5	20	10	23.9	8.3	11.0	1389	50	868	
195/50R15 86V RD	197290	5.5-6.0-7.0	17	10	22.8	7.7	10.5	1168	50	911	
205/50R15 89V RD	197300	5.5-6.5-7.5	20	10	23.1	8.3	10.6	1279	50	900	
225/50R15 95V RD	197310	6.0-7.0-8.0	21	10	23.9	9.1	11.0	1521	50	869	
205/55R16 94V RD	197260	5.5-6.5-7.5	21	10	25.0	8.4	11.5	1477	50	832	
215/55R16 97V RD	197270	6.0-7.0-7.5	22	10	25.4	8.8	11.7	1609	50	818	
225/55R16 99V RD	197280	6.0-7.0-8.0	25	10	25.7	9.2	11.8	1709	50	808	
195/50R16 88V RD	197220	5.5-6.0-7.0	19	10	23.8	7.8	11.0	1235	50	872	
205/50R16 91V RD	197230	5.5-6.5-7.5	21	10	24.1	8.3	11.2	1356	50	862	
225/50R16 96V RD	197240	6.0-7.0-8.0	23	10	24.9	9.1	11.5	1565	50	835	
245/50R16 97V	197250	7.0-7.5-8.5	24	10	25.6	9.8	11.7	1609	44	812	
205/45ZR16 87W RD	197210	6.5-7.0-7.5	19	10	23.3	8.3	10.9	1201	50	890	
205/40ZR16 83W RD	197200	7.0-7.5-8.0	18	10	22.5	8.6	10.5	1074	50	924	
235/55ZR17 103W RD	197370	6.5-7.5-8.5	28	10	27.2	9.6	12.5	1929	50	764	
215/50ZR17 95W RD	197380	6.0-7.0-7.5	24	10	25.5	8.7	11.8	1521	50	814	
225/50ZR17 98W RD	197390	6.0-7.0-8.0	25	10	25.9	9.0	12.0	1653	50	802	
235/50ZR17 100W RD	197400	6.5-7.5-8.5	27	10	26.3	9.5	12.1	1764	50	791	
205/45ZR17 88W RD	197140	6.5-7.0-7.5	21	10	24.4	8.3	11.4	1235	50	852	
215/45ZR17 91W RD	197150	7.0-8.0	22	10	24.8	8.4	11.5	1356	50	839	
225/45ZR17 94W RD	197160	7.0-7.5-8.5	23	10	25.1	8.9	11.7	1477	50	828	
235/45ZR17 97W RD	197170	7.5-8.0-9.0	24	10	25.4	9.4	11.8	1609	50	819	
245/45ZR17 99W RD	197180	7.5-8.0-9.0	25	10	25.7	9.8	11.9	1709	50	808	
205/40ZR17 84W RD	197110	7.0-7.5-8.0	19	10	23.5	8.6	11.1	1102	50	882	
215/40ZR17 87W RD	197120	7.0-7.5-8.5	20	10	23.9	8.9	11.2	1201	50	869	
245/40ZR17 95W RD	197410	8.0-8.5-9.5	23	10	24.7	9.6	11.5	1521	50	840	
255/40ZR17 98W RD	197130	8.5-9.0-10.0	25	10	25.0	10.3	11.6	1653	50	830	
275/40ZR17 98W	197420	9.0-9.5-11.0	28	11	25.6	10.9	11.9	1653	44	812	
225/50ZR18 95W	197630	6.0-7.0-8.0	27	10	26.9	9.0	12.5	1521	44	773	
235/50ZR18 101W RD	197430	6.5-7.5-8.5	28	10	27.2	9.4	12.6	1819	50	762	
215/45ZR18 93W RD	197650	7.0-8.0	22	9.8	25.4	8.3	11.9	1433	50	818	
225/45ZR18 95W RD	197360	7.0-7.5-8.5	23	10	25.9	8.7	12.1	1521	50	802	
235/45ZR18 98W RD	198000	7.5-8.0-9.0	26	10	26.4	9.3	12.3	1653	50	786	
245/45ZR18 100W RD	197440	7.5-8.0-9.0	27	10	26.8	9.7	12.4	1764	50	776	
255/45ZR18 103W RD	197450	8.0-8.5-9.5	29	10	27.1	10.1	12.5	1929	50	767	
205/40ZR18 86W RD	197060	7.0-7.5-8.0	21	10	24.5	8.6	11.5	1168	50	847	
215/40ZR18 89W RD	197070	7.0-7.5-8.5	21	10	24.8	8.7	11.6	1279	50	839	
225/40ZR18 92W RD	197080	7.5-8.0-9.0	22	10	25.1	9.1	11.8	1389	50	827	
235/40ZR18 95W RD	197090	8.0-8.5-9.5	23	10	25.4	9.6	11.9	1521	50	819	

RD = Reinforced. Bold designates measuring rim width. When a V, W or Y appears in the service description, maximum speed capability is as follows: V= 149mph, W= 168mph, Y= 186mph.

All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.

TOYO TIRES®



PROXES⁴

ALL-SEASON ULTRA-HIGH PERFORMANCE RADIAL

PERFORMANCE

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (1/32")	Inflated Dimension		Static Loaded Radius (inch)	Max. Load (lbs.)	Max. Pressure (PSI)	Revs Per Mile	Price
					Overall Diameter (inch)	Overall Width (inch)					
245/40ZR18 97W RD	197100	8.0- 8.5 -9.5	24	10	25.7	9.8	12.0	1609	50	808	
255/40R18 99W RD	197990	8.5- 9.0 -10.0	25	10	26.1	10.3	12.1	1709	50	797	
215/35ZR18 84W RD	197050	7.0- 7.5 -8.5	20	10	24.0	8.6	11.3	1102	50	865	
275/35ZR18 99W RD	197460	9.0- 9.5 -11.0	27	11	25.4	10.7	11.9	1709	50	817	
215/35ZR19 85W RD	197190	7.0- 7.5 -8.5	21	10	24.9	8.6	11.8	1135	50	835	
225/35ZR19 88W RD	197020	7.5- 8.0 -9.0	21	10	25.2	8.9	11.9	1235	50	824	
235/35ZR19 91W RD	197030	8.0- 8.5 -9.5	22	10	25.6	9.4	12.1	1356	50	813	
245/35ZR19 93W RD	197040	8.0- 8.5 -9.5	24	10	25.7	9.8	12.1	1433	50	807	
255/35ZR19 96W RD	197580	8.5- 9.0 -10.0	25	10.3	26.0	10.0	12.2	1565	50	798	
265/30ZR19 93W RD	197470	9.0- 9.5 -10.0	26	10	25.3	10.6	11.9	1433	50	822	
295/30ZR19 100W RD	197480	10.0- 10.5 -11.0	30	11	25.9	11.7	12.2	1764	50	801	
245/45ZR20 103W RD	197490	7.5- 8.0 -9.0	31	10	28.7	9.6	13.4	1929	50	724	
255/45ZR20 105W RD	197500	8.0- 8.5 -9.5	32	10	29.1	10.1	13.5	2039	50	715	
245/40ZR20 99W RD	197570	8.0- 8.5 -9.5	27	10	27.6	9.6	13.0	1709	50	752	
275/40ZR20 106W RD	197510	9.0- 9.5 -11.0	33	11	28.7	10.9	13.4	2094	50	725	
225/35ZR20 90W RD	197350	7.5- 8.0 -9.0	21	10	26.4	9.0	12.5	1323	50	786	
245/35ZR20 95W RD	197330	8.0- 8.5 -9.5	26	10	26.8	9.6	12.6	1521	50	776	
255/35ZR20 97W RD	197340	8.5- 9.0 -10.0	27	10	27.0	10.2	12.7	1609	50	768	
275/35ZR20 102W RD	197590	9.0- 9.5 -11.0	30	11	27.5	10.7	12.9	1874	50	756	
215/30ZR20 82W RD	197520	7.5	20	10	25.1	8.5	12.0	1047	50	827	
255/30ZR20 92W RD	197530	8.5- 9.0 -9.5	26	10	26.1	10.0	12.4	1389	50	797	
295/30ZR20 101W RD	197540	10.0- 10.5 -11.0	31	11	26.9	11.7	12.7	1819	50	771	
295/25ZR20 95 W RD	197550	10.0- 10.5 -11.0	29	11	26.0	11.6	12.3	1521	50	799	
255/35ZR22 99W RD	197810	8.5- 9.0 -10.0	30	10	29.1	10.0	13.8	1709	50	715	
235/30ZR22 90W RD	197820	8.5	25	10	27.8	9.5	13.3	1323	50	747	
245/30ZR22 92W RD	197610	8.0- 8.5 -9.0	28	10.2	28.0	9.4	13.3	1389	50	743	
255/30R22 95W RD	198010	8.5- 9.0 -9.5	29	10	28.1	9.8	13.4	1521	50	738	
265/30ZR22 97W RD	197830	9.0- 9.5 -10.0	30	10	28.3	10.4	13.5	1609	50	734	
285/30ZR22 101W RD	197840	9.5- 10.0 -10.5	32	11	28.8	11.2	13.7	1819	50	721	
305/25ZR22 99W RD	197850	10.5- 11.0 -11.5	33	11	28.0	12.0	13.4	1709	50	741	
255/30ZR24 97W RD	197910	8.5- 9.0 -9.5	32	10	30.0	10.0	14.4	1609	50	692	
275/30ZR24 101W RD	197920	9.0- 9.5 -10.0	35	11	30.6	10.7	14.6	1819	50	679	
275/25ZR24 96W RD	197940	10.0	32	11	29.5	10.6	14.1	1565	50	704	
275/25R26 98V RD	197950	10.0	33	10	31.4	10.7	15.1	1653	50	661	
275/25ZR28 99W RD	197960	10.0	37	10	33.3	10.7	16.1	1709	50	624	

RD = Reinforced. Bold designates measuring rim width. When a V, W or Y appears in the service description, maximum speed capability is as follows: V= 149mph, W= 168mph, Y= 186mph.

All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.