

TOYO TIRES®

VERSADO LX™

Toyo's new all-season Versado LX™ is a premium luxury, touring tire designed for optimum ride comfort, low noise and light snow for today's luxury vehicles. Versado LX gives new meaning to refined performance in touring comfort.

Typical Vehicle Matches

Acura RL; BMW 7 Series; Cadillac DTS; Chrysler 300C; Honda Accord; Infinity Q45; Lexus LS430, LS460; Lincoln Town Car; Mercedes E320, S500; Mercury Milan; Toyota Camry, Avalon; VW Passat

Typical Customer Matches

Security-conscious luxury upscale buyers who demand improved quiet and ride characteristics to replace Original Equipment fitments for vehicles

Competitive Products


- Bridgestone Turanza Serenity
- Continental ContiProContact
- Goodyear Assurance ComforTred
- Goodyear Assurance TripleTred
- Michelin HydroEdge
- Michelin Energy MXV4 Plus
- Michelin Energy MXV4 S8




PASSENGER

UTQG
T-Rated: 700 A B
H/V Rated: 400 AA A
W Rated: 360 AA A

MILEAGE WARRANTY	
Speed Symbol	Mileage
T-Rated	80K
H-Rated	60K
V-Rated	40K
W-Rated	None (Limited Warranty on workmanship and materials only)

Customer Benefit	Product Features
Quiet Ride and Smooth Performance Throughout Tread Life	<ul style="list-style-type: none"> • “Silent Wall™” grooving has perpendicular serrations reducing pipe resonance, thereby lowering noise  <p style="text-align: right;">Silent Wall Technology</p> <ul style="list-style-type: none"> • Multi-Wave sipes reduce pattern wear, thereby reducing noise throughout the long life of the tread
Luxury and Comfort	<ul style="list-style-type: none"> • Asymmetric tread design and special non-directional tread enables cross rotation to reduce irregular wear
All-Season and Snow Performance	<ul style="list-style-type: none"> • OUTSIDE- Larger contact patch to increase lateral stiffness • INSIDE- Higher sipe density to obtain the “Edge Effect,” biting the snow for more traction
Wet and Dry Traction	<ul style="list-style-type: none"> • Silica compounding in H-, V- and W-rated sizes aids wet performance without sacrificing tread life • Asymmetric, non-directional tread

VERSADO LX™

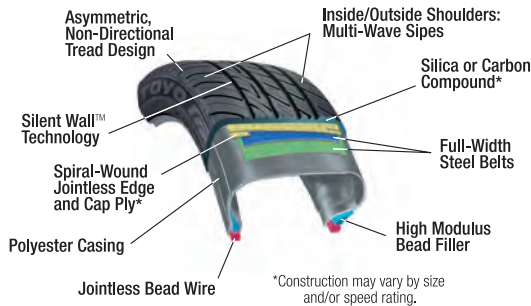

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (3/32")	Inflated Dimension		Static Loaded Radius (inch)	Max. Load (lbs.)	Max. Pressure (PSI)	Revs Per Mile	Price
					Overall Diameter (inch)	Overall Width (inch)					
205/70R15 96T	111500	5.0-6.0-7.0	23	12	26.4	8.1	11.9	1565	44	788	
215/70R15 98T	111510	5.5-6.5-7.0	24	12	26.9	8.6	12.1	1653	44	773	
195/65R15 91H	111520	5.5-6.0-7.0	20	10	25.0	7.8	11.4	1356	51	831	
205/65R15 94T	111530	5.5-6.0-7.5	22	12	25.5	8.1	11.6	1477	44	816	
205/65R15 94H	111540	5.5-6.0-7.5	22	10	25.4	8.2	11.6	1477	51	818	
215/65R15 96T	111550	6.0-6.5-7.5	22	12	26.0	8.6	11.8	1565	44	799	
195/60R15 88H	111560	5.5-6.0-7.0	20	10	24.2	7.8	11.1	1235	51	858	
195/60R15 88V	111570	5.5-6.0-7.0	20	10	24.2	7.8	11.1	1235	51	858	
205/60R15 91H	111580	5.5-6.0-7.5	20	10	24.8	8.1	11.3	1356	51	839	
215/60R15 94T	111590	6.0-6.5-7.5	22	12	25.2	8.6	11.5	1477	44	824	
205/65R16 95T	111600	5.5-6.0-7.5	24	12	26.4	8.1	12.1	1521	44	786	
215/65R16 98T	111610	6.0-6.5-7.5	25	12	27.0	8.6	12.3	1653	44	770	
225/65R16 100H	111620	6.0-6.5-8.0	26	10	27.4	8.9	12.4	1764	51	758	
235/65R16 103T	111630	6.5-7.0-8.5	29	12	28.0	9.4	12.7	1929	44	743	
205/60R16 92H	111640	5.5-6.0-7.5	22	10	25.6	8.1	11.8	1389	51	811	
205/60R16 92V	111650	5.5-6.0-7.5	22	10	25.6	8.1	11.8	1389	51	811	
215/60R16 95T	111660	6.0-6.5-7.5	24	12	26.2	8.5	12.0	1521	44	794	
215/60R16 95V	111670	6.0-6.5-7.5	24	10	26.0	8.6	11.9	1521	51	799	
225/60R16 98T	111680	6.0-6.5-8.0	26	12	26.6	8.8	12.1	1653	44	780	
225/60R16 98H	111690	6.0-6.5-8.0	27	11	26.5	8.9	12.1	1653	51	783	
235/60R16 100H	111700	6.5-7.0-8.5	28	11	27.0	9.5	12.3	1764	51	769	
205/55R16 91H	111710	5.5-6.5-7.5	20	10	24.8	8.3	11.4	1356	51	836	
215/55R16 93H	111720	6.0-7.0-7.5	23	10	25.2	8.8	11.6	1433	51	823	
225/55R16 95V	111730	6.0-7.0-8.0	25	10	25.7	9.1	11.8	1521	51	809	
225/50R16 92V	111740	6.0-7.0-8.0	22	10	24.8	9.0	11.4	1389	51	839	
215/65R17 99T	111750	6.0-6.5-7.5	27	12	28.0	8.6	12.8	1709	44	742	
215/60R17 96H	111760	6.0-6.5-7.5	26	10	27.1	8.5	12.4	1565	51	766	
225/60R17 99H	111770	6.0-6.5-8.0	28	11	27.5	8.9	12.6	1709	51	754	
215/55R17 94V	111780	6.0-7.0-7.5	26	10	26.3	8.8	12.1	1477	51	791	
225/55R17 97H	111790	6.0-7.0-8.0	27	10	26.7	9.0	12.3	1609	51	777	
225/55R17 97V	111800	6.0-7.0-8.0	27	10	26.7	9.0	12.3	1609	51	777	
235/55R17 99T	111120	6.5-7.5-8.5	29	11	27.2	9.6	12.5	1709	44	765	
235/55R17 99H	111810	6.5-7.5-8.5	28	10	27.1	9.6	12.4	1709	51	766	
205/50R17 93V XL	111820	5.5-6.5-7.5	21	10	25.1	8.1	11.7	1433	50	827	
215/50R17 95V XL	111830	6.0-7.0-7.5	24	10	25.5	8.6	11.8	1521	50	814	
225/50R17 94W	111840	6.0-7.0-8.0	26	10	25.9	8.9	12.0	1477	51	802	
235/50R17 96V	111850	6.5-7.5-8.5	27	10	26.3	9.3	12.1	1565	51	790	
245/50R17 99V	111860	7.0-7.5-8.5	30	10	26.6	9.7	12.3	1709	51	780	
225/45R17 94V XL	111130	7.0-7.5-8.5	24	10	25.0	8.8	11.6	1477	50	832	
235/45R17 94W	111870	7.5-8.0-9.0	24	11	25.4	9.0	11.8	1653	51	819	
245/45R17 99V XL	111140	7.5-8.0-9.0	26	10	25.6	9.4	11.9	1709	50	811	
255/45R17 98V	111880	8.0-8.5-9.5	30	11	26.0	10.0	12.0	1653	51	798	

XL = Extra Load. Bold designates measuring rim width. When a T, H, V, W or Y appears in the service description, maximum speed capability is as follows: T=118 mph, H=130 mph, V=149 mph, W=168 mph and Y=186. All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.

PASSENGER

TOYO TIRES®

VERSADO LX™



PASSENGER

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (1/32")	Inflated Dimension		Static Loaded Radius (inch)	Max. Load (lbs.)	Max. Pressure (PSI)	Revs Per Mile	Price
					Overall Diameter (inch)	Overall Width (inch)					
225/60R18 100H	111890	6.0- 6.5 -8.0	30	10	28.5	8.9	13.1	1764	51	728	
225/55R18 98T	111900	6.0- 7.0 -8.0	30	11	27.8	8.9	12.8	1653	44	749	
235/55R18 100V	111060	6.5- 7.5 -8.5	29	10	28.1	9.6	12.9	1764	51	739	
225/50R18 95T	111070	6.0- 7.0 -8.0	28	11	26.9	8.9	12.5	1521	44	773	
235/50R18 97V	111080	6.5- 7.5 -8.5	28	10	27.2	9.5	12.6	1609	51	764	
245/50R18 100V	111910	7.0- 7.5 -8.5	32	10	27.6	9.8	12.7	1764	51	753	
245/45R18 96V	111920	7.5- 8.0 -9.0	28	10	26.6	9.4	12.4	1565	51	781	
255/45R18 103V XL	111090	8.0-8.5-9.5	29	11	27.0	10.0	12.5	1929	50	770	
245/40R18 93V	111100	8.0- 8.5 -9.5	26	10	25.7	9.5	12.0	1433	51	808	
275/35R18 95V	111110	9.0- 9.5 -11.0	29	11	25.6	10.6	12.0	1521	51	811	

XL = Extra Load. Bold designates measuring rim width. When a T, H, V, W or Y appears in the service description, maximum speed capability is as follows: T=118 mph, H=130 mph, V=149 mph, W=168 mph and Y=186. All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information.